



AMERICAN HIGH VOLTAGE

D Series Capacitor Charging High Voltage Power Supply

D Series

General Description

The D Series are regulated high voltage power supplies designed for capacitor charging applications. They provide outputs of up 1kV and power levels to 20 Watts. The output of each power supply is floating with respect to the input line and this allows either polarity to be configured. The output voltage of the D may be varied either with the unit trimpot, an external trimpot, or via an external control signal. The output ripple is typically less than 1% at full load. Each power supply may be programmed down to zero output voltage. All D models offer 0.01% line regulation and 3% no-load to full load regulation. All Ds are reverse input voltage and short circuit protected.

Features


Regulated Floating Output
Encapsulated
100 VDC to 1,000 VDC models available
20 Watt power
28 VDC input
Trimpot, Resistance or Voltage program



Connection Diagram



INPUT SIDE SHOWN




OUTPUT SIDE SHOWN

Pins:

5. + HV output
6. - HV output

Pins:

1. Ground
2. +5.0V Reference
3. Vcontrol
4. +28 VDC input



INPUT SIDE SHOWN



AMERICAN HIGH VOLTAGE

Electrical Characteristics

(at 25 degrees C unless otherwise specified)

D Series

Parameter	Conditions		Value			Units
			Min	Typical	Max	
Supply Voltage*:	(all power models)		25VDC	28VDC	31 VDC	VDC
Input Current:	No Load: (20 W models)		150	160	175	mA
	Full Load: (20 W models)		0.98	1.0	1.1	A
Output Ripple:	No Load (all models):		0.4%	0.5 %	0.7%	Vpp
	Full Load (all models):		0.8%	0.9%	1%	Vpp
Load Regulation:	No Load to Full Load				3%	V _{NL} /V _L
	Half Load to Full Load				2%	V _{NL} /V _L
Output Linearity	No Load			1%		$\frac{\Delta V_{OUT}}{\Delta V_{OUT} (ideal)}$
Output Linearity	Full Load (all models):			1%		$\frac{\Delta V_{OUT}}{\Delta V_{OUT} (ideal)}$
Short Circuit Current:	20 Watt Models:			Try-again		after 1 sec
Power Efficiency:	Full Load (20 W)		70%	72 %	75%	P _{OUT} /P _{IN}
Reverse Input Polarity	Protected to 50 VDC					
Temperature Drift:	No Load				200	ppm/DegC
	Full Load				200	ppm/Deg C
Thermal Rise:	No Load (case)				25	degrees C
	Full Load (case)				45	degrees C
Slew Rate (10% - 90%)	No Load				100	mS
	Full Load				120	mS
Slew Rate (90% - 10%)	No Load				300	mS
	Full Load				200	mS
Drain Out Time	No Load (5 TC)				150	mS

* Other input voltages available: 15VDC, 24VDC, 28VDC and 48VDC



AMERICAN HIGH VOLTAGE

Physical Characteristics

(at 25 degrees C unless otherwise specified)

Parameter	Conditions	Value	Units
Dimensions	MKS English	50.8 W x 101.6L x 20.6 H 2.0 W x 4.0 L x 0.81 H	mm inches
Volume:	MKS English	105 6.4	cm ³ inch ³
Mass:	MKS English	156 5.6	grams oz
Packaging:	Black anodized aluminum case with RTV elastomer encapsulation		
Finish	Smooth brushed aluminum		
Terminations:	Input and control: Teflon terminals (4) HV Output: Teflon terminals (2)		

Environmental Characteristics

(at 25 degrees C unless otherwise specified)

Parameter	Conditions	Value	Units
Temperature Range	case temperature case temperature	-40 degrees to + 71 degrees -40 degrees to + 160 degrees	Celsius Fahrenheit
Shock:	MIL-STD-810 Method 516	40 g's	Proc IV
Altitude:	pins sealed against corona pins sealed against corona	-350 to + 16,700 -1,000 to +55,000	meters feet
Vibrations:	MIL-STD-810 Method 514	20 g's	Curve E
Thermal Shock	MIL-STD-810 Method 504	-40 deg C to + 71 deg C	Class 2





Models Available (as of August 2019):

($V_{in} = 28 \text{ VDC}$)

Model	Output Voltage Range	Power	Ripple (max)
D-1	0 – 100 VDC	20 Watts	1 Vpp
D-3	0 – 300 VDC	20 Watts	3 Vpp
D-5	0 – 500 VDC	20 Watts	5 Vpp
D-10	0 – 1,000 VDC	20 Watts	10 Vpp

D Series Performance Charts

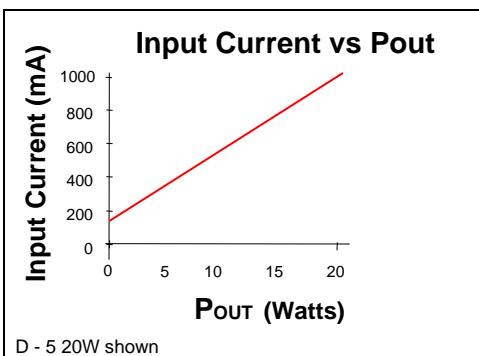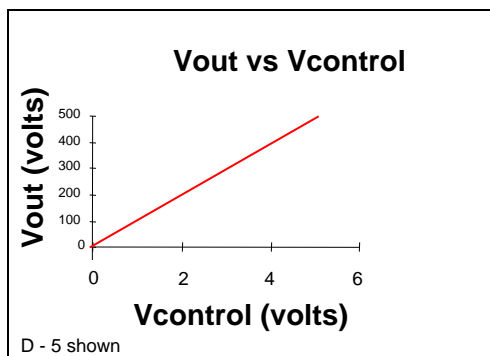

D Series Application Notes

The D Series high voltage power supplies utilize an input voltage of 28 VDC. They can be adjusted to provide a fixed output voltage or they can be controlled by either an external resistance or an external voltage. Figure 1 below shows the basic hookup using the internal reference as the source of the control voltage. By connecting the Vcontrol (Pin 3) to the +5.0 volt reference (Pin 2) the maximum output voltage of the power supply is obtained and is adjustable via the trimpot located on the top surface of the power supply. The maximum voltage is fixed by the model and is a regulated output. In this configuration, the output voltage will not vary with input line fluctuations or output load changes up to the maximum power rating for the power supply. For standard 28 VDC input models, the input line may vary from 25 VDC to 31 VDC and the output voltage will remain regulated. Standard output loads may be as high as 20 Watts of power. As shown in Figure 1 below, the simple connection of a D unit to a DC source of voltage will provide a high voltage stepped-up output. The input AC bypass capacitor C1 is optional and is utilized to prevent switching spikes from riding back on the input power lines. Values of 0.1 uF to 10 uF are commonly used.

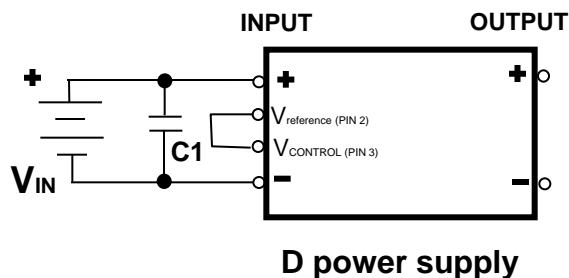


Figure 1: Basic D hookup schematic for maximum output

The output voltage of the D unit may be reduced in value by placing a voltage lower than +5.0 volt onto the Vcontrol pin (Pin 3). By placing a voltage of +2.5 VDC onto the control voltage pin the output will be reduced in half. Figure 2 details a simple method of using an external voltage source to vary the output voltage of the D power supply. Typical values of input impedance for the D are 5K Ohms. This makes programming via a DAC or operational amplifier an easy chore for the D power supply. The control voltage is referenced to the input ground. There is no connection between the input ground and output HV return in all D power supplies.



AMERICAN HIGH VOLTAGE

D Series Application Notes (continued)

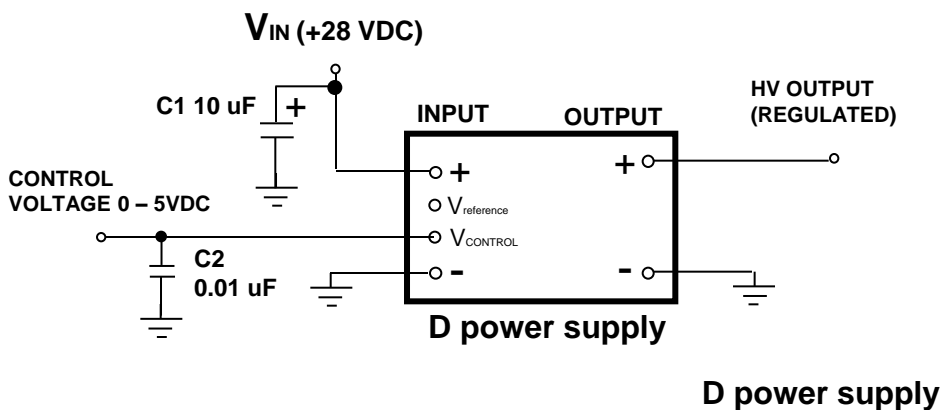


Figure 2: Voltage programming

Capacitor C1 removes switching spikes from the input line and C2 is an AC bypass to insure smooth voltage control levels.

The D power supply may also be programmed by using a simple trimpot and the internal +5.0 volt reference. Figure 3 shows this topology. Because the input impedance of the control voltage pin is 5K Ohms, the output of the D may be controlled between minimum and maximum values using the equation given. The output in both configurations can always be lowered or adjusted via the internal trimpot located on the top surface of the power supply.


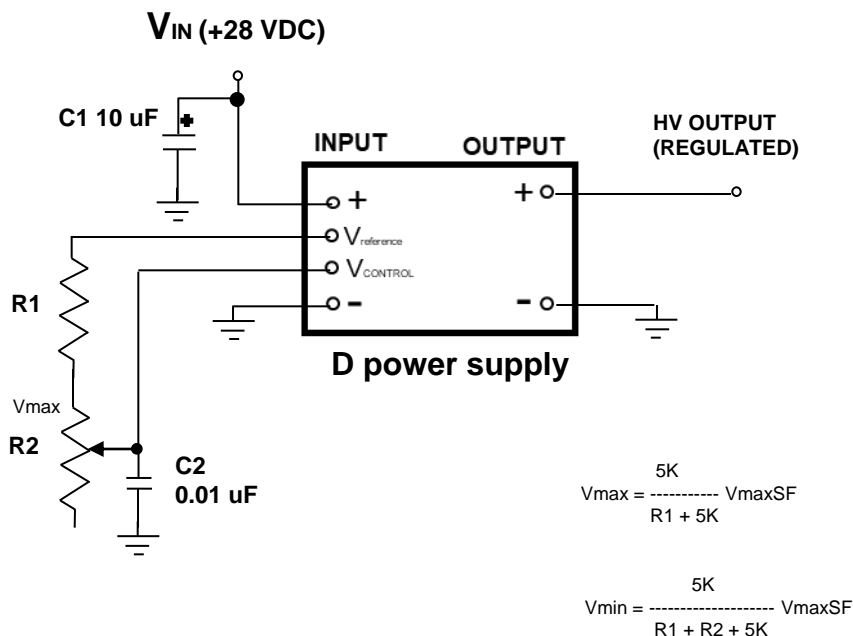


Figure 3: Resistance Programming

Equivalent D Circuit Model

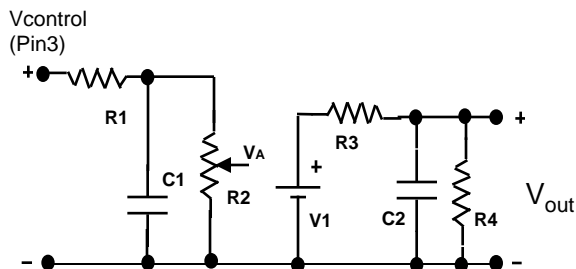

Equivalent D HVPS Circuit Model

$R1 = 100 \text{ Ohms}$

$R2 = 5K \text{ Ohms (trimpot)}$

$R3 = (3.0 \times V_{out_{max}}) \text{ Ohms}$

$R4 = (2.6 \times V_{out_{max}}^2) \text{ Ohms}$

$C1 = (0.01 \times 10^{-6}) \text{ Farads}$

$C2 = (0.004 \times I_{out_{max}} / V_{out_{max}}) \text{ Farads}$

$V1 = (V_A \times V_{out_{max}} / 5.0) \text{ Volts}$

For example, for an D-3 20W:

$V_{out_{max}} = 300 \text{ V}$

$P_{out_{max}} = 20 \text{ W}$

$I_{out_{max}} = 0.007 \text{ A}$

$R1 = 100 \text{ Ohms}$

$R2 = 5K \text{ Ohms}$


$R3 = 900 \text{ Ohms}$

$R4 = 240k \text{ Megohm}$

$C1 = 0.01 \text{ uF}$

$C2 = 0.94 \text{ uF}$

Outline Drawing: (inches (millimeters))

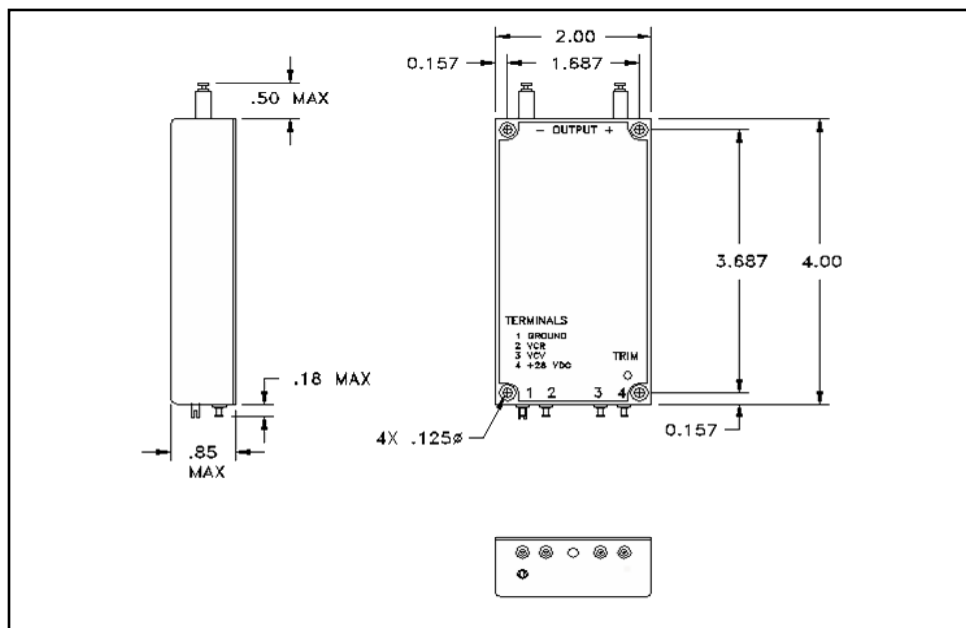

Ordering Information:

D - XX

XX = Output voltage

Example:

D - 5 Maximum output = 500 V 20 Watts 28 VDC input